

Product Description


HEUCOFLASH™ LQ2 is a nitrite free, highly effective, liquid flash rust inhibitor for all kind of waterborne protective coatings. The VOC free inhibitor can be used for all kind of water based protective coatings, metall treatment or packaging protection.

Appearance | Yellow liquid

Technical Data

	Unit	Value	Test Method
Density	[g/cm ³]	typ. 1.1	
pH value		typ. 8.0	
Viscosity	[max. cps]	typ. 30	

Benefits

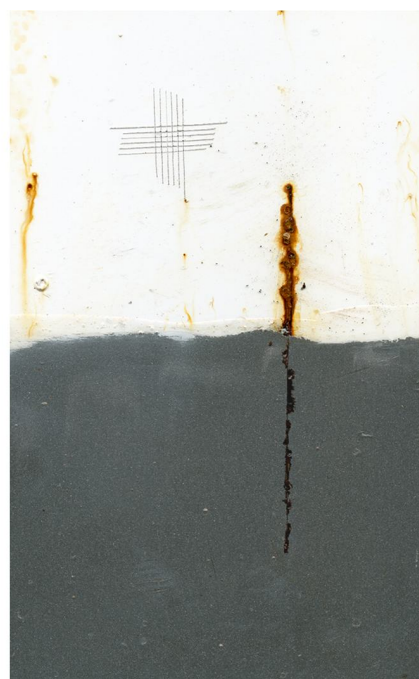

Control vs. a combination of an anticorrosive pigment and a liquid flash rust inhibitor in an APEO free, water based styrene acrylic primer.

Packaging and Handling

Packaging	30 kg plastic pail
Packaging	200 kg metal drum
Packaging	Different types of packaging are available on request
Storage	> 5 °C

Tds-ac_lq2-01_02

Our application information and any other information in this document as well as our product specifications are based on our current state of knowledge at the Revision Date mentioned in the respective document. They are non-binding and cannot be taken as a guarantee. The processing company must establish the suitability of individual products itself. As their use lies beyond our knowledge and control, we cannot accept any liability relating to the use of our products in particular applications. In addition to that, the legal rights of third parties must always be considered. The product specification agreed between the customer and ourselves is the basis upon which our general sales and delivery conditions are set and is the deciding factor concerning any liabilities. Our standard specification is then valid if no specification has been agreed upon between the customer and ourselves.