

**HEUCODUR® & VANADUR®  
INORGANIC COLOR SOLUTIONS FOR  
THE MOST DEMANDING APPLICATIONS**



BRIGHTER COLORS.  
BRIGHTER LIFE.

# INTRODUCTION



As the quality and performance of industrial products continue to improve, so do the demands on their appearance and durability. Therefore, there is a steadily increasing requirement for more durable pigments to color products such as paints, plastics, building materials and ceramics. As a consequence, the complex inorganic color pigments are of increasing importance to formulators.

They need to satisfy the highest demands for heat stability and chemical inertness as well as weather- and light fastness, while taking account of the ecological aspects of the end product. To date, complex inorganic color pigments are the most stable class of pigments developed by the color industry.



HEUCODUR® pigments belong to this class. Their unique fastness properties are directly related to high-temperature processing (above 800 °C / 1500 °F), which yields homogeneous crystalline complex inorganic color pigment compounds. This high-temperature process demands a very precise control over the chemical and technical parameters, which has been made possible by the most up to date state of the art facilities for the production of HEUCODUR® pigments.


The result is a very accurate control over particle morphology and particle size distribution, thereby explaining the improved high color strength and hiding power of HEUCODUR® as well as the enhanced dispersibility obtainable with these pigments in various formulated systems.

# HEUCODUR® NICKEL RUTILE PIGMENTS

NAME	FULL SHADE	REDUCTION 1:1	PIGMENT	COLOR INDEX	MEDIAN D50 [µm] <sup>1</sup>	OIL ABSORPTION [g/100 g] <sup>2</sup>	HEAT RESISTANCE [°C] <sup>3</sup>
HEUCODUR® YELLOW G 9064 (C)			(Ni,Sb,Ti) <sub>2</sub> O <sub>2</sub>	P.Y. 53	typ. 0.8	typ. 16	600
HEUCODUR® YELLOW 152 (C) or (P)			(Ni,Sb,Ti) <sub>2</sub> O <sub>2</sub>	P.Y. 53	typ. 1.1	typ. 16	600
HEUCODUR® YELLOW 156 (C) or (P)			(Ni,Sb,Ti) <sub>2</sub> O <sub>2</sub>	P.Y. 53	typ. 1.2	typ. 15	600
HEUCODUR® YELLOW 86 (C) or (P)			(Ni,Sb,Ti) <sub>2</sub> O <sub>2</sub>	P.Y. 53	typ. 1.0	typ. 15	600
HEUCODUR® YELLOW G 9082 (C) or (P)			(Ni,Sb,Ti) <sub>2</sub> O <sub>2</sub>	P.Y. 53	typ. 1.3	typ. 14	600
HEUCODUR® YELLOW G 9116 (C) or (P)			(Ni,Cr,Sb,Ti) <sub>2</sub> O <sub>2</sub>	P.Y. 53	typ. 0.6	typ. 20	600

Due to the limitation of printing process, some slight variations between the color as illustrated may be observed.  
(C) = specified for Coatings, (P) = specified for Plastics

The structure of rutile yellow is based on the rutile crystal modification of titanium dioxide. These types of pigments offer outstanding hiding power, light fastness and resistance to temperature, chemicals (including acid and alkali) and weathering.

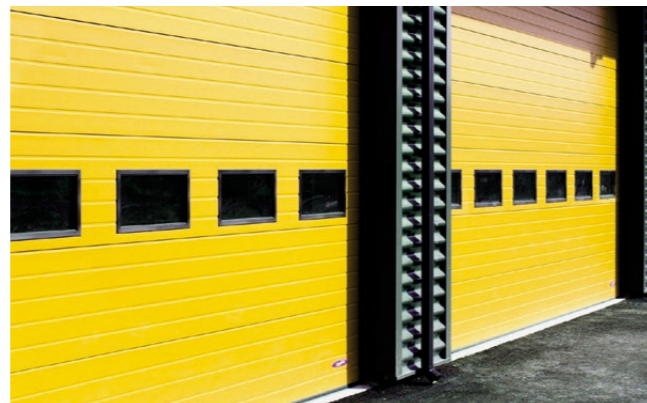

Detailed know-how and process control of each of the manufacturing steps is needed to achieve optimised pigment performance. For rutile yellows, different colors can be obtained by variation of the composition and calcination temperature/profile. A higher calcination temperature results in darker grades with higher chroma.

In combination with organic pigments HEUCODUR® Yellow can enhance color saturation and light fastness in coatings as well as in plastic applications.



# HEUCODUR® CHROME RUTILE PIGMENTS

NAME	FULL SHADE	REDUCTION 1:1	PIGMENT	COLOR INDEX	MEDIAN D50 [µm] <sup>1</sup>	OIL ABSORPTION [g/100 g] <sup>2</sup>	HEAT RESISTANCE [°C] <sup>3</sup>
HEUCODUR® YELLOW 3R (C) or (P)			(Cr,Sb,Ti) <sub>2</sub> O <sub>2</sub>	P.Br. 24	typ. 0.5	typ. 20	600
HEUCODUR® YELLOW 253 (C)			(Cr,Sb,Ti) <sub>2</sub> O <sub>2</sub>	P.Br. 24	typ. 0.8	typ. 18	600
HEUCODUR® YELLOW 2530 (P)			(Cr,Sb,Ti) <sub>2</sub> O <sub>2</sub>	P.Br. 24	typ. 0.7	typ. 18	600
HEUCODUR® YELLOW 252 (C) or (P)			(Cr,Sb,Ti) <sub>2</sub> O <sub>2</sub>	P.Br. 24	typ. 0.9	typ. 19	600
HEUCODUR® YELLOW G 9239 (C) or (P)			(Cr,Sb,Ti) <sub>2</sub> O <sub>2</sub>	P.Br. 24	typ. 0.6	typ. 21	600
HEUCODUR® YELLOW 5R (C)			(Cr,Sb,Ti) <sub>2</sub> O <sub>2</sub>	P.Br. 24	typ. 0.6	typ. 16	600
HEUCODUR® YELLOW 255 (C) or (P)			(Cr,Sb,Ti) <sub>2</sub> O <sub>2</sub>	P.Br. 24	typ. 0.9	typ. 17	600
HEUCODUR® YELLOW 2550 (P)			(Cr,Sb,Ti) <sub>2</sub> O <sub>2</sub>	P.Br. 24	typ. 1.0	typ. 20	600
HEUCODUR® YELLOW 6R (C) or (P)			(Cr,Sb,Ti) <sub>2</sub> O <sub>2</sub>	P.Br. 24	typ. 1.1	typ. 16	600
HEUCODUR® YELLOW 256 (C) or (P)			(Cr,Sb,Ti) <sub>2</sub> O <sub>2</sub>	P.Br. 24	typ. 1.4	typ. 16	600
HEUCODUR® YELLOW 2570 (C) or (P)			(Cr,Sb,Ti) <sub>2</sub> O <sub>2</sub>	P.Br. 24	typ. 0.9	typ. 20	600
HEUCODUR® YELLOW 259 (C) or (P)			(Cr,Sb,Ti) <sub>2</sub> O <sub>2</sub>	P.Br. 24	typ. 1.5	typ. 15	600
HEUCODUR® YELLOW 2590 (C) or (P)			(Cr,Sb,Ti) <sub>2</sub> O <sub>2</sub>	P.Br. 24	typ. 1.3	typ. 18	600
HEUCODUR® YELLOW G 9202 (P)			(Cr,Sb,Ti) <sub>2</sub> O <sub>2</sub>	P.Br. 24	typ. 1.7	typ. 17	600
HEUCODUR® YELLOW G 9180 (P)			(Cr,Sb,Ti) <sub>2</sub> O <sub>2</sub>	P.Br. 24	typ. 1.7	typ. 15	600

Due to the limitation of printing process, some slight variations between the color as illustrated may be observed.  
(C) = specified for Coatings, (P) = specified for Plastics

Chrome rutiles are available in a large variety of color shades and can be custom formulated to meet specific applications and requirements. Excellent dispersibility and less shear sensitive colors are offered with the HEUCODUR® chromium and nickel rutile line.

# HEUCODUR® (INVERSE) SPINEL PIGMENTS

NAME	FULL SHADE	REDUCTION 1:3	PIGMENT	COLOR INDEX	MEDIAN D50 [µm] <sup>1</sup>	OIL ABSORPTION [g/100g] <sup>2</sup>	HEAT RESISTANCE [°C] <sup>3</sup>
HEUCODUR® BLUE 550			CoAl <sub>2</sub> O <sub>4</sub>	P.BI. 28	typ. 0.9	typ. 28	600
HEUCODUR® BLUE 551			CoAl <sub>2</sub> O <sub>4</sub>	P.BI. 28	typ. 0.9	typ. 25	600
HEUCODUR® BLUE 552			CoAl <sub>2</sub> O <sub>4</sub>	P.BI. 28	typ. 0.9	typ. 27	600
HEUCODUR® BLUE 2R			CoAl <sub>2</sub> O <sub>4</sub>	P.BI. 28	typ. 1.1	typ. 39	600
HEUCODUR® BLUE 555			Co(Al,Cr) <sub>2</sub> O <sub>4</sub>	P.BI. 36	typ. 0.7	typ. 15	600
HEUCODUR® BLUE 5-100			Co(Al,Cr) <sub>2</sub> O <sub>4</sub>	P.BI. 36	typ. 0.9	typ. 16	600
HEUCODUR® BLUE 4G			Co(Al,Cr) <sub>2</sub> O <sub>4</sub>	P.BI. 36	typ. 0.2	typ. 14	600
HEUCODUR® GREEN 5G (C) or (P)*			(Co,Ni,Zn) <sub>2</sub> (Ti,Al) <sub>4</sub>	P.G. 50	typ. 1.0	typ. 16	600

\* = In accordance with CLP Regulation No. 1272/2008 this product is classified as dangerous substances with Hazard Classes and Category Codes:

Skin Sens. 1; H317 / Carc. 1A; H350i / STOT RE 2; H373

Due to the limitation of printing process, some slight variations between the color as illustrated may be observed.

(C) = specified for Coatings, (P) = specified for Plastics; without = specified for Coatings and Plastics

Cobalt blue pigments are generated in the typical spinel crystal modification. The color shades range from a red shade blue to a green shade blue by increasing the trivalent chromium content in the crystal structure. The hiding power increases correspondingly with increased chromium content as seen in HEUCODUR® Blue 5-100.

HEUCODUR® Blue 550 is a high strength P.BI. 28 with a strong red shade hue. Cobalt titanium green pigments have a structure typical of an inverse spinel. Cobalt blue and green pigments prevent warpage in polyolefins.

# HEUCODUR® BROWN / BLACK

NAME	FULL SHADE	REDUCTION 1:5	PIGMENT	COLOR INDEX	MEDIAN D50 [µm] <sup>1</sup>	OIL ABSORPTION [g/100g] <sup>2</sup>	HEAT RESISTANCE [°C] <sup>3</sup>
HEUCODUR® BROWN 869			(Fe,Cr) <sub>3</sub> O <sub>3</sub>	P.Br. 29	typ. 0.6	typ. 23	600
HEUCODUR® BLACK 953-1			Cu(Cr,Fe) <sub>2</sub> O <sub>4</sub>	P.Bk. 28	typ. 1.2	typ. 15	600
HEUCODUR® BLACK 9-100			Cu(Cr,Fe) <sub>2</sub> O <sub>4</sub>	P.Bk. 28	typ. 0.9	typ. 16	600
HEUCODUR® BLACK 955 (C)			Co(Cr,Fe) <sub>2</sub> O <sub>4</sub>	P.Bk. 27	typ. 1.4	typ. 17	600

Due to the limitation of printing process, some slight variations between the color as illustrated may be observed.





(C) = specified for Coatings, (P) = specified for Plastics; without = specified for Coatings and Plastics



Iron chromite brown pigments are the ideal pigment choice for e.g. coloring PVC applications without affecting the stability of the PVC.

HEUCODUR® Black 953-1, HEUCODUR® Black 9-100 and HEUCODUR® Black 955 are black spinel pigments based on copper and cobalt, respectively.



# VANADUR® (ENCAPSULATED) BISMUTH VANADATE PIGMENTS

NAME	FULL SHADE	REDUCTION 1:1	COLOR INDEX	MEDIAN D50 [µm] <sup>1</sup>	OIL ABSORPTION [g/100 g] <sup>2</sup>	HEAT RESISTANCE [°C] <sup>4</sup>	ALKALI RESISTANCE [°C] <sup>6</sup>
<b>VANADUR® 2108</b> (C)			P.Y. 184	typ. 0.7	typ. 19	200	5
<b>VANADUR® 1010</b> (C)			P.Y. 184	typ. 0.7	typ. 27	200	5

NAME	FULL SHADE	REDUCTION 1:1	COLOR INDEX	MEDIAN D50 [µm] <sup>1</sup>	OIL ABSORPTION [g/100 g] <sup>2</sup>	HEAT RESISTANCE IN HDPE [°C] <sup>5</sup>	ALKALI RESISTANCE [°C] <sup>6</sup>
<b>VANADUR® PLUS 9010</b> (C) or (P)			P.Y. 184	typ. 0.7	typ. 29	300	5

Due to the limitation of printing process, some slight variations between the color as illustrated may be observed.  
(C) = specified for Coatings, (P) = specified for Plastics

1 = According to ISO 13320


2 = According to ISO 787-5

3 = Tested in heat resistant coating up to 600 °C for 30 min.

4 = Tested in alkyd/melamine system

5 = Tested in HDPE [1:3] system acc. to DIN EN 12877-2

6 = Pigment was dipped into soda solution (10%). Rating with gray scale: 1 = poor, 5 = excellent

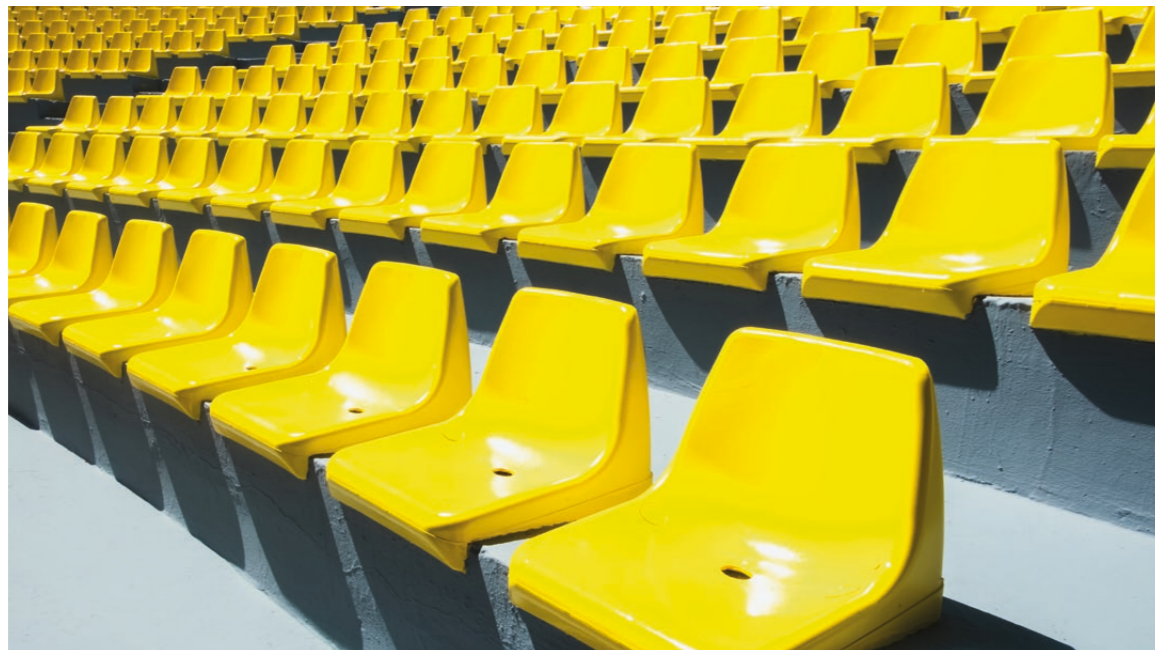

VANADUR® 1010 and VANADUR® 2108 are green shade bismuth vanadate pigments with outstanding application properties like improved opacity, high gloss, excellent weather and light fastness and good tinting strength. They are quite easily dispersible and can be used in solventbased as well as in waterborne systems including aqueous dispersions.

VANADUR® 2108 is based on a zinc-free technology and features an extraordinary high tinting strength.

VANADUR® PLUS 9010 is a silica encapsulated green shade bismuth vanadate pigment. For some applications stability properties of standard bismuth vanadate regarding heat, SO<sub>2</sub> or alkali resistance are not sufficient.

Especially plastic applications require a stable color shade even at very high temperatures. To fulfill these requirements Heubach developed this highly stabilized bismuth vanadate pigment. Due to the encapsulation, this pigment shows improved application properties like extreme heat resistance and improved acid, alkali and SO<sub>2</sub> resistance, light- and UV-resistance.



## HEUBACH'S RANGE OF HIGH PERFORMANCE INORGANIC PIGMENTS OFFERS SOLUTIONS FOR THE MOST DEMANDING APPLICATIONS SUCH AS:

- Coil coatings, powder coatings, industrial coatings, architectural coatings etc.
- Plastics (PE, PP, PVC etc.) for masterbatch, building products, etc.
- Engineering plastics (ABS, PC etc.) for e.g. automotive applications
- Fiber and thin film plastic applications
- Exterior building products, e.g. cement, concrete, roofing granules etc.
- Ceramic applications

# OUR SERVICE



At Heubach, customer satisfaction comes first. As a supplier of high-quality pigment and pigment preparation solutions we support our customers anywhere where pigments are in use.

With active service centers both globally and regionally we provide our customers with the technical support essential for the implementation of customer-specific requirements and solutions.

Fully equipped technical laboratories and centers enable us to carry out tests for all relevant applications, such as printing inks, paints and coatings, including corrosion protection, coil and powder coatings and plastics.

Custom color adjustments play a significant role both in coatings and plastics applications.

We have extensive expertise in the development of colors for a variety of plastics, paint and coating systems. Depending on fastness properties, application or processing requirements, we can deliver the right color for your application, plastic compounds or even a specific paint system.



## HEUBACH GROUP

Marketing and Sales  
Phone +49 5326 520 (Germany)

de.sales@heubachcolor.com  
www.heubach.com

This information corresponds to the present state of our knowledge and is intended as a general description of our products and their possible applications. We make no warranties, express or implied, as to the information's accuracy, adequacy, sufficiency, or freedom from defect and assumes no liability in connection with any use of this information. Any user of this product is responsible for determining the suitability of our products for its particular application. \*Nothing included in this information waives any of our General Terms and Conditions of Sale, which control unless it agrees otherwise in writing. Any existing intellectual/industrial property rights must be observed. Due to possible changes in our products and applicable national and international regulations and laws, the status of our products could change. Material Safety Data Sheets providing safety precautions, that should be observed when handling or storing our products, are available upon request and are provided in compliance with applicable law. You should obtain and review the applicable Material Safety Data Sheet information before handling any of these products. For additional information, please contact us.

\*For sales to customers located within the United States and Canada the following applies in addition  
NO EXPRESS OR IMPLIED WARRANTY IS MADE OF THE MERCHANTABILITY, SUITABILITY, FITNESS FOR  
A PARTICULAR PURPOSE OR OTHERWISE OF ANY PRODUCT OR SERVICE. 02/2022

™ Trademark

© Trademark registered in many countries

INO 7001 EN | 03.2023

BRIGHTER COLORS.  
BRIGHTER LIFE.